


PD-522 SINGLE MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:




= Keyed Side of Door

VISION LITE OPTIONS:



(Viewable Opening Size Shown)

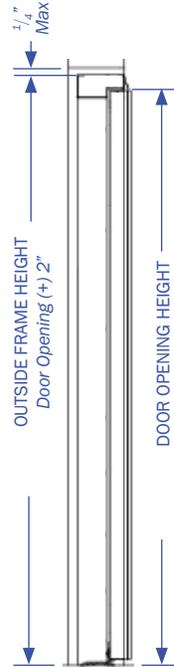

SIDE VIEW

← Positive Water Force Only
 ←



TOP VIEW

↑ Positive Water Force Only

SOLD/QUOTE TO:

NAME:	
COMPANY:	
ADDRESS:	
CITY, STATE, ZIP:	
PHONE:	FAX:
EMAIL:	

PROJECT INFO:

PROJECT NAME:	
OPENING NAME:	QUANTITY:
WATER PROTECTION HEIGHT: (inches)	LOADING REQUIRED:
HYDRODYNAMIC: (FPS) (PSF)	IMPACT: (LBS) " X "
DOOR OPENING WIDTH: (inches)	DOOR OPENING HEIGHT: (inches)

ACTIVE PANEL:	LATCHING HARDWARE:	VISION LITE:
LEFT PANEL REVERSE	PANIC HARDWARE:	10"x 10"
RIGHT PANEL REVERSE	EXTERIOR TRIM:	5"x 20"
CLOSER (INCLUDED)		

MOUNTING SURFACE:

CIP	CMU (GROUT-FILLED)	STRUCTURAL STEEL (WALL THICKNESS IN INCHES)
-----	--------------------	---

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:	
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)	1/2" ADA (STANDARD)
316 STAINLESS STEEL	No. 4 (BRUSHED FINISH)	1 1/4" RAISED (Required with WPH greater than 96")

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL)	S/W#	COLOR:	sherwin-williams.com
--	------	--------	--

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
<small>(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)</small>			<small>(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)</small>	