

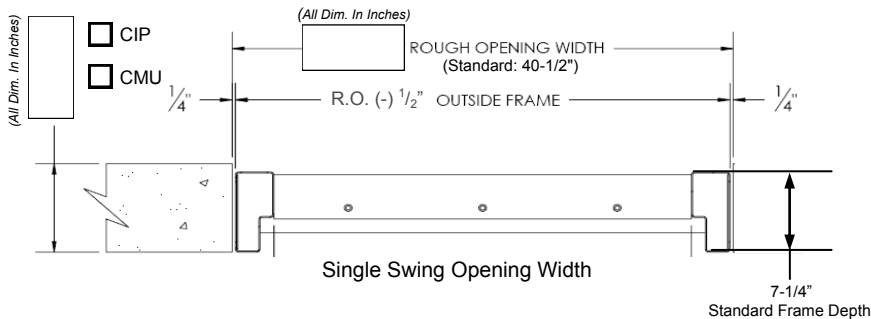


PD-520 MEASURING GUIDE & ORDER FORM

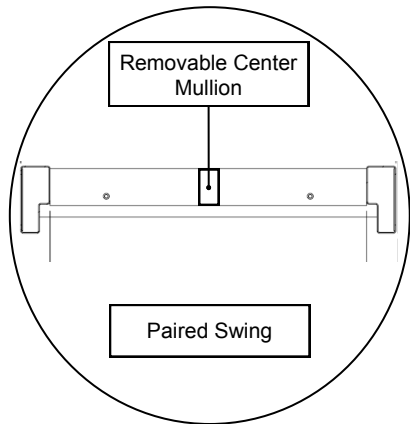

Toll Free 877.446.1519
 Phone: 701.746.4519
 Email: 4psinfo@psdoors.com
 Website: www.psdoors.com

SWING DIRECTION GUIDE	VISION LITE GUIDE (viewable)								
<p>LHR </p> <p>RHR </p> <p>PAIRED </p> <p> = Keyed Side of Door</p>	<table border="1"> <tr> <td></td> <td></td> </tr> <tr> <td>10" x 10" Center</td> <td>5" x 20" Center</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>5" x 20" Offset</td> <td>22" x 22" Center</td> </tr> </table>			10" x 10" Center	5" x 20" Center			5" x 20" Offset	22" x 22" Center
10" x 10" Center	5" x 20" Center								
5" x 20" Offset	22" x 22" Center								

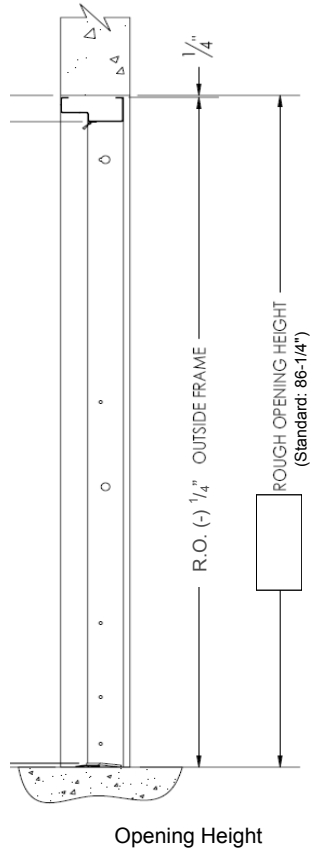

QUOTATION REQUESTED PD-520 ORDER

SOLD/QUOTE TO:

Name: _____
 Company: _____
 Address: _____
 City, State, Zip: _____
 Phone: _____ Fax: _____
 E-Mail: _____

SHIP TO:

Name: _____	Date: _____
Address: _____	P.O. #: _____
City, State, Zip: _____	DOOR TAG #: _____
Phone: _____	SHIP VIA: _____

PROJECT NAME: _____

QUANTITY **R.O. WIDTH:** **R.O. HEIGHT:** (All Dim. In Inches)

WATER PROTECTION HEIGHT REQUIRED: (All Dim. In Inches)

<p>LATCHING HARDWARE</p> <p><input type="checkbox"/> TOUCH BAR (VON DUPRIN 98 SERIES)</p> <p><input type="checkbox"/> MORTISE LOCK (SARGENT 8200)</p> <p><input type="checkbox"/> 2-POINT WEDGE LATCH</p>	<p>SWING DIRECTION</p> <p><input type="checkbox"/> LHR</p> <p><input type="checkbox"/> RHR</p> <p><input type="checkbox"/> LHR/RHR (PAIRED)</p>	<p>If Paired Swing Door, Active Panel is the:</p> <p><input type="checkbox"/> LHR <input type="checkbox"/> BOTH</p> <p><input type="checkbox"/> RHR</p>
--	--	--

<p>VISION LITES (viewable)</p> <p><input type="checkbox"/> 10" x 10" <input type="checkbox"/> 5" x 20"</p> <p><input type="checkbox"/> 22" x 22"</p> <p><input type="checkbox"/> CENTER <input type="checkbox"/> OFFSET (5" x 20" ONLY)</p>	<p>If Paired Swing Door, Locate Vision Lite in:</p> <p><input type="checkbox"/> Left Panel</p> <p><input type="checkbox"/> Right Panel</p> <p><input type="checkbox"/> Both Panels</p>	<p>DOOR CLOSER</p> <p>LCN 4111 (OPTIONAL)</p> <p><input type="checkbox"/> ACTIVE DOOR ONLY</p> <p><input type="checkbox"/> BOTH DOORS</p>
--	---	--

<p>MOUNTING SURFACE</p> <p><input type="checkbox"/> CMU <input type="text"/> (Wall Thickness)</p> <p><input type="checkbox"/> CIP</p>	<p>DOOR/FRAME MATERIAL</p> <p><input type="checkbox"/> MILD STEEL (STANDARD)</p> <p><input type="checkbox"/> STAINLESS STEEL (304-2b mill)</p> <p><input type="checkbox"/> STAINLESS STEEL (316-2b mill)</p> <p><input type="checkbox"/> STAINLESS STEEL (316 #4)</p>	<p>SILL</p> <p><input type="checkbox"/> 1/2" LOW SILL (STANDARD)</p> <p><input type="checkbox"/> 1-1/4" RAISED SILL</p>
--	--	--

First Coat Finish Option (standard: SW 4026 Slate Gray) FIRE RATING F9EI 9GH98

Sherwin-Williams Industrial
 Enamel Color Code:

DURATION: 60¢ 90¢ 120¢

FM FLOOD RATING REQUESTED: YES NO
 (Available on specific product configurations, consult PS DOORS for details.)