



KWIK-CON II+ CONCRETE AND MASONRY SCREW

1/4" diameter anchor data is bubbled
for convenience

*See Pages 3-6




KWIK-CON II+ CONCRETE AND MASONRY SCREW

PRODUCT DESCRIPTION

KWIK-CONN II+ concrete and masonry screw anchors

Anchor System	Features and Benefits
KWIK-CON II+ fastener KWIK-CON II+ drive tool, and a Hilti matched tolerance carbide-tipped drill bit.	• Improved silver KWIK Cote finish that exceeds 1000 hours of protection from red rust in ASTM B117 • Salt spray testing • More durable than zinc plating • Zinc electroplating and passivation with chromate require toxic chemicals. The KWIK Cote zinc rich organic finish is easy on the environment • Zinc electroplating and passivation with chromate require toxic chemicals. The KWIK Cote zinc rich organic finish is easy on the environment • Applicable specific carbide tipped bits optimize performance in concrete or masonry • Torx Hex washer head for fast secure driving • Torx or Phillips flat head for countersunk




Uncracked concrete

Approvals/Listings	
Metro-Dade County	NOA 12-0625.05

MATERIAL SPECIFICATIONS

Carbon steel expansion sleeves and spacer sleeves are manufactured from cold rolled steel.
Carbon steel anchors are zinc plated in accordance with ASTM B633, SC 1, Type III.
Stainless steel anchor components are manufactured from AISI Type 304 stainless steel.

MATERIAL SPECIFICATIONS

Carbon Steel with KWIK Cote¹	- Screws manufactured from 1018 to 1022 cold rolled steel case hardened to HRC 45 minimum - Minimum tensile strength and yield strength for the 1/4-in. is 138 ksi and 137 ksi, respectively - Minimum tensile strength and yield strength for the 3/16-in. is 138 ksi and 137 ksi, respectively
KWIK Cote corrosion resistant coating	KWIK Cote is a zinc-rich basecoat with an aluminum-rich topcoat.
AISI Type 410 stainless steel¹	- Screws manufactured from AISI Type 410 stainless steel. Minimum tensile strength and yield strength for the 1/4-in. is 184ksi and 157 ksi, respectively - Minimum tensile strength and yield strength for the 3/16-in. is 194 ksi and 170 ksi, respectively
Head Styles	- Tapered flat head with #3 Phillips recess for 3/16- and 1/4-in. anchors - Tapered flat head with T-25 TORX recess for 3/16-in. anchor - Tapered flat head with T-27 TORX recess for 1/4-in. anchor 5/16-in. hex washer with internal T-25 TORX recess for 3/16- and 1/4-in. anchors 
Head diameter	- Maximum 0.507 in. for 3/16- and 1/4-in. tapered Phillips flat head and 1/4-in. tapered T-27 TORX flat head anchors - Maximum 0.385 in. for 3/16-in. tapered T-25 TORX flat head anchor - Maximum 0.432 in. maximum for 3/16- and 1/4-in. T-25 TORX hex washer head anchors
Thread diameter	Nominal 3/16-in., Major dia. is 0.217 inches, Minor² is 0.145 inches
Shank diameter	- Nominal 3/16-in. is 0.170 inches - Nominal 1/4-in. is 0.224 inches
Lengths (in.)	1-1/4, 1-3/4, 2-1/4, 2-3/4, 3-1/4, 3-3/4, 4 (See ordering information section)
Thread design	Trilobular, cold formed.
Threads per inch	- Nominal 3/16-in. have 8 tpi. - Nominal 1/4-in. have 8 tpi. Inches of thread per fastener 1.875 inches maximum
Bending capacity	Ductility at 10° minimum

¹ Minimum tensile and yield strength are the average of strength measurement of (30) tested samples. These are not minimum steel properties or minimum manufacturing specifications.

² Minor diameter is the average measurement taken from (30) samples. This is not a controlled dimension.

DESIGN INFORMATION IN CONCRETE PER ALLOWABLE STRESS DESIGN

Table 1 — Tension and shear allowable loads in concrete ^{1,2}

Nominal anchor diameter (in.)	Nominal embedment in. (mm)	$f'_c = 2,000$ psi		$f'_c = 4,000$ psi		$f'_c = 6,000$ psi	
		Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)
3/16	1 (25)	100 (0.44)	260 (1.16)	125 (0.56)	260 (1.16)	185 (0.82)	280 (1.25)
3/16	1-3/4 (44)	275 (1.22)	260 (1.16)	295 (1.31)	265 (1.18)	325 (1.45)	300 (1.33)
1/4	1 (25)	190 (0.85)	325 (1.45)	240 (1.07)	390 (1.73)	275 (1.22)	540 (2.40)
1/4	1-3/4 (44)	425 (1.89)	560 (2.49)	475 (2.1)	600 (2.82)	525 (2.3)	600 (2.67)

¹ Screws installed in holes drilled with Hilti HFG carbide bits.

² Allowable loads are based on a safety factor of 4.

Table 2 — Tension and shear ultimate loads in concrete ¹

Nominal anchor diameter (in.)	Nominal embedment in. (mm)	$f'_c = 2,000$ psi		$f'_c = 4,000$ psi		$f'_c = 6,000$ psi	
		Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)
3/16	1 (25)	400 (1.78)	1,050 (4.67)	500 (2.22)	1,050 (4.67)	750 (3.34)	1,150 (5.12)
3/16	1-3/4 (44)	1,100 (4.89)	1,050 (4.67)	1,180 (5.25)	1,070 (4.78)	1,300 (5.78)	1,200 (5.34)
1/4	1 (25)	760 (3.38)	1,300 (5.78)	970 (4.31)	1,575 (7.01)	1,100 (4.89)	2,175 (9.68)
1/4	1-3/4 (44)	1,700 (7.56)	2,250 (10.0)	1,900 (8.5)	2,400 (10.7)	2,100 (9.3)	2,400 (10.7)

¹ Screws installed in holes drilled with TKG bits.

Table 3 — Tension and shear allowable loads in hollow block ^{1,2,3,4}

Nominal anchor diameter (in.)	Nominal embedment in. (mm)	Tension lb (kN)	Shear lb (kN)
3/16	1 (25)	150 (0.67)	225 (1.00)
3/16	1-3/4 (44)	290 (1.29)	300 (1.33)
1/4	1 (25)	165 (0.73)	275 (1.22)
1/4	1-3/4 (44)	310 (1.38)	400 (1.78)

¹ All values for anchors installed in hollow concrete masonry with a minimum prism strength of 1,500 psi. Concrete block may be lightweight, medium-weight or normal-weight conforming to ASTM C90.

² Screws installed in holes drilled with TKB bits.

³ Allowable loads calculated using a factor of safety of 4.

⁴ Installation in the mortar joints is outside the scope of the published data.

Table 4 — Tension and shear allowable loads in red brick ^{1,2,3}

Nominal anchor diameter (in.)	Nominal embedment in. (mm)	Tension lb (kN)	Shear lb (kN)
3/16	1 (25)	125 (0.56)	235 (1.05)
3/16	1-3/4 (44)	350 (1.56)	300 (1.33)
1/4	1 (25)	205 (0.91)	415 (1.85)
1/4	1-3/4 (44)	350 (1.56)	500 (2.22)

¹ This test was performed on individual specimens of ASTM C62 common red brick. Due to the wide variations encountered in the compressive strength of brick, these values should be considered guide values.

² Allowable loads are based on a safety factor of 4.

³ Installation in the mortar joints is outside the scope of the published data.

Load values are for anchors installed a minimum of sixteen diameters on center and a minimum edge distance of sixteen diameters. Anchor spacing may be reduced to twelve diameters provided loads are reduced by 20 percent. Edge distance may be reduced to six diameters provided loads are reduced by 20 percent in tension and 70 percent in shear.

Combined shear and tension loading

$$\left(\frac{N_d}{N_{rec}} \right) + \left(\frac{V_d}{V_{rec}} \right) \leq 1.0$$

INSTALLATION INSTRUCTIONS

Installation Instructions For Use (IFU) / Operating Instructions (OI) throughout the document are included with each product package. They can also be viewed or downloaded online at www.hilti.com. Because of the possibility of changes, always verify that downloaded IFU are current when used. Proper installation is critical to achieve full performance. Training is available on request. Contact Hilti Technical Services for applications and conditions not addressed in the (IFU)/Operating Instructions (OI).


ORDERING INFORMATION¹

KWIK-CON II+ fasteners




5/16 - in. Magnetic nut setter or T-25 TORX bit

Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 316-114 THWH	3/16	1-1/4	1-1/4	0
KWIK-CON II+ 316-114 THWH Bulk	3/16	1-1/4	1-1/4	0
KWIK-CON II+ 316-134 THWH	3/16	1-3/4	1-3/4	0
KWIK-CON II+ 316-134 THWH Bulk	3/16	1-3/4	1-3/4	0
KWIK-CON II+ 316-214 THWH	3/16	2-1/4	1-3/4	1/2
KWIK-CON II+ 316-234 THWH	3/16	2-3/4	1-3/4	1
KWIK-CON II+ 316-234 THWH Bulk	3/16	2-3/4	1-3/4	1
KWIK-CON II+ 316-314 THWH	3/16	3-1/4	1-3/4	1-1/2
KWIK-CON II+ 316-334 THWH	3/16	3-3/4	1-3/4	2
KWIK-CON II+ 316-4 THWH	3/16	4	1-3/4	2-1/4



5/16 - in. Magnetic nut setter or T-25 TORX bit

Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 14-114 THWH	1/4	1-1/4	1-1/4	0
KWIK-CON II+ 14-114 THWH Bulk	1/4	1-1/4	1-1/4	0
KWIK-CON II+ 14-134 THWH	1/4	1-3/4	1-3/4	0
KWIK-CON II+ 14-134 THWH Bulk	1/4	1-3/4	1-3/4	0
KWIK-CON II+ 14-214 THWH	1/4	2-1/4	1-3/4	1/2
KWIK-CON II+ 14-234 THWH	1/4	2-3/4	1-3/4	1
KWIK-CON II+ 14-234 THWH Bulk	1/4	2-3/4	1-3/4	1
KWIK-CON II+ 14-314 THWH	1/4	3-1/4	1-3/4	1-1/2
KWIK-CON II+ 14-334 THWH	1/4	3-3/4	1-3/4	2
KWIK-CON II+ 14-334 THWH Bulk	1/4	3-3/4	1-3/4	2
KWIK-CON II+ 14-4 THWH	1/4	4	1-3/4	2-1/4
KWIK-CON II+ 14-114 THWH Stainless Steel	1/4	1-1/4	1-1/4	0
KWIK-CON II+ 14-234 THWH Stainless Steel	1/4	2-3/4	1-3/4	1




T-25 TORX bit

Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 316-114 TFH	3/16	1-1/4	1-1/8	0
KWIK-CON II+ 316-134 TFH	3/16	1-3/4	1-5/8	0
KWIK-CON II+ 316-134 TFH Bulk	3/16	1-3/4	1-5/8	0
KWIK-CON II+ 316-214 TFH	3/16	2-1/4	1-3/4	3/8
KWIK-CON II+ 316-234 TFH	3/16	2-3/4	1-3/4	7/8
KWIK-CON II+ 316-234 TFH Bulk	3/16	2-3/4	1-3/4	7/8
KWIK-CON II+ 316-314 TFH	3/16	3-1/4	1-3/4	1-3/8
KWIK-CON II+ 316-334 TFH	3/16	3-3/4	1-3/4	1-7/8
KWIK-CON II+ 316-334 TFH Bulk	3/16	3-3/4	1-3/4	1-7/8
KWIK-CON II+ 316-4 TFH	3/16	4	1-3/4	2-1/8



T-27 TORX bit

Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 14-114 TFH	1/4	1-1/4	1-1/16	0
KWIK-CON II+ 14-134 TFH	1/4	1-3/4	1-9/16	0
KWIK-CON II+ 14-134 TFH Bulk	1/4	1-3/4	1-9/16	0
KWIK-CON II+ 14-214 TFH	1/4	2-1/4	1-3/4	5/16
KWIK-CON II+ 14-234 TFH	1/4	2-3/4	1-3/4	13/16
KWIK-CON II+ 14-314 TFH	1/4	3-1/4	1-3/4	1-5/16
KWIK-CON II+ 14-314 TFH Bulk	1/4	3-1/4	1-3/4	1-5/16
KWIK-CON II+ 14-334 TFH	1/4	3-3/4	1-3/4	1-13/16
KWIK-CON II+ 14-4 TFH	1/4	4	1-3/4	2-1/16

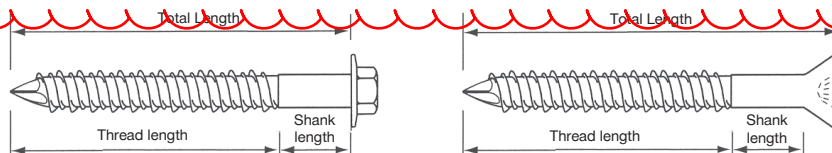¹ All dimensions in inches

KWIK-CON II+ fasteners



#3 Phillips bit

Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 316-114 PFH	3/16	1-1/4	1-1/16	0
KWIK-CON II+ 316-134 PFH	3/16	1-3/4	1-9/16	0
KWIK-CON II+ 316-214 PFH	3/16	2-1/4	1-3/4	5/16
KWIK-CON II+ 316-234 PFH	3/16	2-3/4	1-3/4	13/16
KWIK-CON II+ 316-314 PFH	3/16	3-1/4	1-3/4	1-5/16
KWIK-CON II+ 316-334 PFH	3/16	3-3/4	1-3/4	1-13/16
KWIK-CON II+ 316-4 PFH	3/16	4	1-3/4	2-1/16
KWIK-CON II+ 316-114 PFH Stainless Steel	3/16	1-1/4	1-1/16	0
KWIK-CON II+ 316-234 PFH Stainless Steel	3/16	2-3/4	1-3/4	13/16



#3 Phillips bit


Description	Diameter	Total length	Thread length	Shank length
KWIK-CON II+ 14-114 PFH	1/4	1-1/4	1-1/16	0
KWIK-CON II+ 14-134 PFH	1/4	1-3/4	1-9/16	0
KWIK-CON II+ 14-214 PFH	1/4	2-1/4	1-3/4	5/16
KWIK-CON II+ 14-234 PFH	1/4	2-3/4	1-3/4	13/16
KWIK-CON II+ 14-314 PFH	1/4	3-1/4	1-3/4	1-5/16
KWIK-CON II+ 14-334 PFH	1/4	3-3/4	1-3/4	1-13/16
KWIK-CON II+ 14-4 PFH	1/4	4	1-3/4	2-1/16

KWIK-CON II+ hex driver system

Description	Qty / pack
KWIK-CON Hex Driver Deluxe Kit	1
KWIK-CON Hex Driver	1
5/16-in. Hex Driver for all THWH	1
5/16-in. Hex Nut Setter/Depth Locator	1
Insert Bit Holder/Depth Locator	1
#3 Phillips Driver for all PFH	1
T-25 TORX Driver for 3/16-in. TFH	1
T-27 TORX Driver for 1/4-in. TFH	1

KWIK-CON II+ matched tolerance drill bits

Description
For 1/4-in. KWIK-CON II+ Applications in normal-weight concrete
TKC Large Concrete Bit SDS+ Hex
TKC Large Concrete Bit Smooth Shank
For 1/4-in. KWIK-CON II+ Applications in lightweight concrete, brick or block
TKB Large Block Bit SDS+ Hex
TKB Large Block Bit Smooth Shank
For 3/16-in. KWIK-CON II+ Applications in normal-weight concrete
TKC Small Concrete Bit SDS+ Hex
TKC Small Concrete Bit Smooth Shank
For 3/16-in. KWIK-CON II+ Applications in lightweight concrete, brick or block
TKB Small Block Bit SDS+ Hex
TKB Small Block Bit Smooth Shank

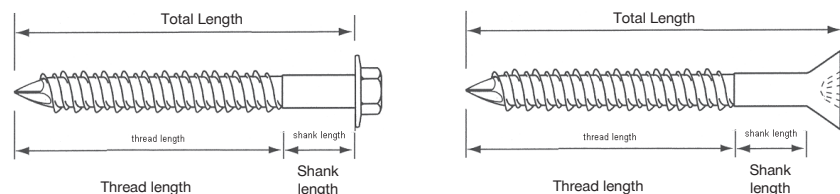

1 All dimensions in inches.



Hilti, Inc. 1-800-879-8000
en español 1-800-879-5000
www.hilti.com

Hilti (Canada) Corporation 1-800-363-4458
www.hilti.ca